


# REDUCING SOCKET

## 316 STAINLESS 150LB

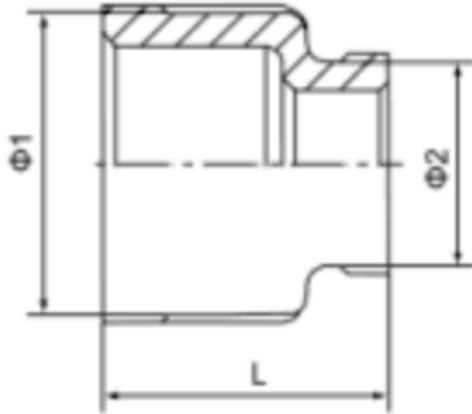

SIZE	PRODUCT CODE	DIMENSIONS			KG EACH
		Φ <sup>1</sup>	Φ <sup>2</sup>	L	
1/4" - 1/8"	6RB1/41/8A	15	12.5	23	
3/8" - 1/4"	6RB3/81/4A	19	15	24	
1/2" - 1/4"	6RB1/21/4A	23.5	15	26	
1/2" - 3/8"	6RB1/23/8A	23.5	20	27	0.030
3/4" - 3/8"	6RB3/43/8A	30	20	30	
3/4" - 1/2"	6RB3/41/2A	30	24	29	0.067
1" - 1/2"	6RB11/2A	36	24	30	
1" - 3/4"	6RB13/4A	36	29	31	0.055
1 1/4" - 3/4"	6RB11/43/4A	45	29	32	
1 1/4" - 1"	6RB11/41A	45	36	35	
1 1/2" - 1"	6RB11/21A	51	36	34	0.197
1 1/2" - 1 1/4"	6RB11/211/4A	51	45	34	6RB11/211/4A
2" - 1 1/4"	6RB211/4A	64	45	41	
2" - 1 1/2"	6RB211/2A	64	51	41	
2 1/2" - 1 1/2"	6RB21/211/2A	79	51	46	
2 1/2" - 2"	6RB21/22	79	64	46	
3" - 2"	6RB32A	94	64	50	
3" - 2 1/2"	6RB321/2A	94	81	50	
4" - 2 1/2"	6RB421/2A	-	-	-	
4" - 3"	6RB43A	120	94	62	

Our range of 150lb fittings are available as threaded BSP with socket weld end connections. They are made from high quality investment castings to ISO4144 or above. BSP threads are to ISO228-1 and 7-1. Made from 316 (CF8M) stainless steel.

Sourced Components Ltd, Unit 33, Daish Way, Dodnor Industrial Estate,  
Newport, Isle of Wight, PO30 5XJ  
tel. 01983 559100 - sales@sourcedcomponents.co.uk



[www.sourcedcomponents.co.uk](http://www.sourcedcomponents.co.uk)